


WALL-MOUNTED EXTRACTORS

CV / KV250 A/B ERP


ÖSTBERG
HEALTHY INDOOR CLIMATE
WITH ENERGY EFFICIENT VENTILATION

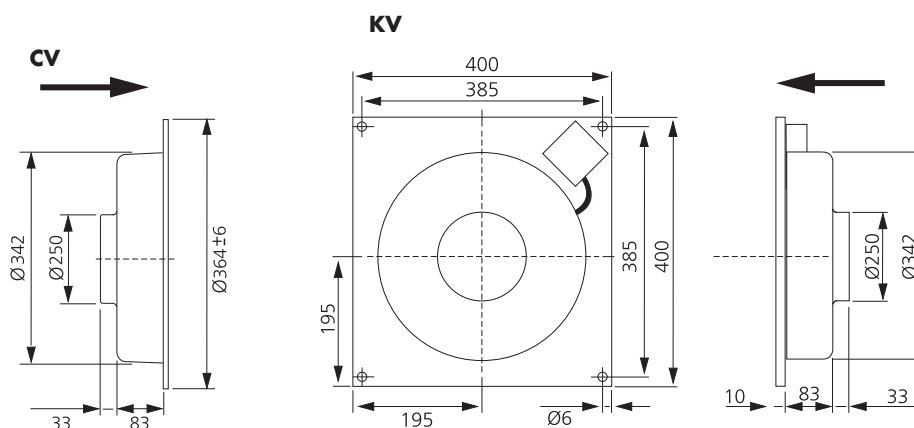

TECHNICAL DATA

MOD.	V/Hz	A	W	rpm	kg	µF	INSUL. CLASS motor	PROTEC. motor	CODE	€
CV 250A	230/50	0,53	120	2580	4,1	4	F	IP 44	0411925	220,50
KVFU 250A	230/50	0,63	146	2720	4,0	5	F	IP 44	0411926	231,00


PRESSURE/FLOW



ACOUSTIC DATA

CV/KV 250 A, 135 l/s 250 Pa	L _{PA}	L _{WA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
AMBIENT	47	54	26	30	34	47	52	47	44	38
INTAKE		74	51	60	67	67	69	68	64	55
CV/KV 250 B ERP, 160 l/s 320 Pa										
AMBIENT	46	53	30	31	42	46	49	46	43	38
INTAKE		75	58	61	71	65	70	65	64	64

POWER/FLOW



DESCRIPTION:

Wall-mounted fans for circular section tubes, with or without square plate.
T MAX air conveyed in degrees Centigrade = 60 .