


WALL-MOUNTED EXTRACTORS

CV / KV 315 B/C ERP


ÖSTBERG
HEALTHY INDOOR CLIMATE
WITH ENERGY EFFICIENT VENTILATION

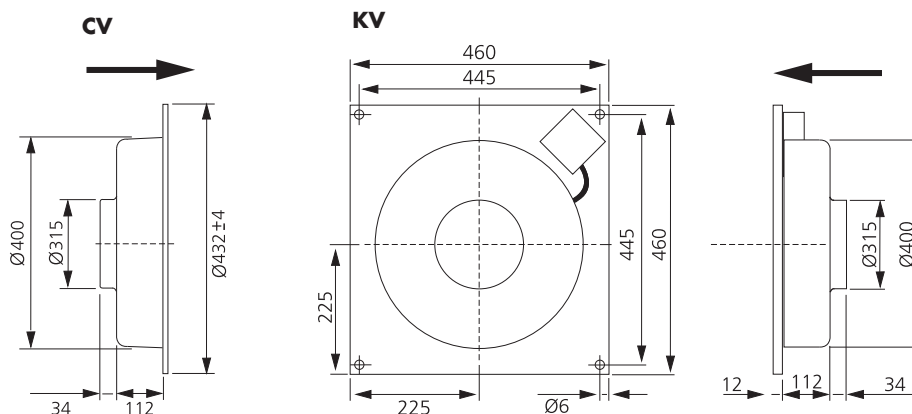

TECHNICAL DATA

MOD.	V/Hz	A	W	rpm	kg	µF	INSUL. CLASS motor	PROTEC. motor	CODE	€
CV/KV 315 B	230/50-60	0,84	190	2465	5,5	5	F	IP 44	0411927	294,00
CV/KV 315 C ERP	230/50-60	0,97	222	2770	5,2	6	F	IP 44	0411928	367,50


PRESSURE/FLOW



ACOUSTIC DATA

CV/KV 315 B, 220 l/s 300 Pa	L _{pA}	L _{wA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
AMBIENT	47	54	28	35	43	48	49	50	45	41
INTAKE		74	54	56	61	65	65	70	67	65
CV/KV 315 C ERP, 180 L/S 425 PA	L _{pA}	L _{wA} tot dB (A)	63	125	250	500	1K	2K	4K	8K
AMBIENT	48	55	26	44	46	47	46	49	49	38
INTAKE		74	52	58	63	61	66	68	68	65

POWER/FLOW



DESCRIPTION:

Wall-mounted fans for circular section tubes, with or without square plate.

T MAX air conveyed in degrees Centigrade = 50 .