


H07RN-F TITANEX®

*Very flexible, for electric tools
and submersible pumps*

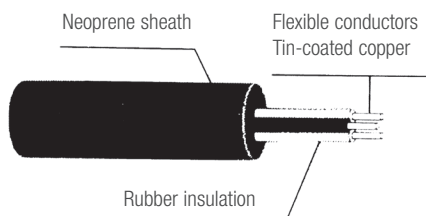

N° CONDUCTORS	RATED CROSS SECTION MM²	Ø EXTERNAL MAX. MM	MAX. CAPACITY IN PERMANENT REGIME A.	CODE	€/m
2X	1	10	19	3318210	1.89
	1.5	11	24	3318215	2.19
	2.5	13.1	33	3318225	3.29
	4	15.1	45	3318240	4.49
3X	1	10.7	19	3318310	2.27
	1.5	11.9	24	3318315	2.60
	2.5	14	33	3318325	4.02
	4	16.2	45	3318340	5.80
4X	1	11.9	17	3318410	2.78
	1.5	13.1	22	3318415	3.33
	2.5	15.5	30	3318425	4.85
	4	17.9	40	3318440	7.30
	6	20	52	3318460	11.85
	10	26.5	71	3318490*	18.52
5X	1.5	14.4	22	3318515	4.90
7X	1.5	18.7	16	3318715	11.18
	2.5	21.8	22	3318725*	14.81
10X	1.5	22	15	3318815*	16.09
	2.5	24.5	20	3318825*	21.98

* 50 m reels.

TECHNICAL CHARACTERISTICS:

Rated voltage: 450/750V

Test voltage: 2500 V in a.c.

Max operating temperature: 85°C

Max short circuit temperature: 250°C

Conductor: flexible annealed red or tin-coated copper cord

Insulation: EL1 quality rubber

Sheath: EM2 quality neoprene

Colour: black RAL 9005

Packs: 100 m reels.

N.B: The price of cables may vary according to the price trends for the raw materials