


THERMISTORS

PTC

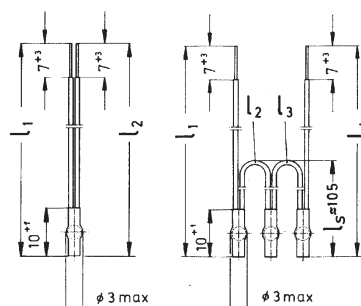

INDIVIDUAL PTC

TEMPERATURE OF INTERVENTION	WIRE COLOUR	CODE	€
110° C	brown-brown	3313906	3.15
130° C	blue-blue	3313908	
140° C	white-blue	3313909	
145° C	white-black	3313910	
150° C	black-black	3313911	
155° C	blue-black	3313912	
180° C	blue-red	3313915	

TRIPLE PTC

TEMPERATURE OF INTERVENTION	WIRE COLOUR	CODE	€
80° C	white-yellow-yellow-white	3313803	4.22
100° C	brown-yellow-yellow-red	3313805	
110° C	brown-yellow-yellow-brown	3313806	
120° C	grey-yellow-yellow-grey	3313807	
130° C	blue-yellow-yellow-blue	3313808	
140° C	white-yellow-yellow-blue	3313809	
150° C	black-yellow-yellow-black	3313811	
160° C	blue-yellow-yellow-red	3313813	
170° C	white-yellow-yellow-green	3313814	
180° C	red-yellow-yellow-white	3313815	

MAIN CHARACTERISTICS:

- Temperature of intervention: from 60 °C to 190 °C with intervals of 10 °C
- Maximum operating voltage: 30 V direct current
- Maximum insulation voltage: 2.5 Kv.

- Response time: in accordance with standards DIN 44081 or 44082

On request, PTCs can be provided in Single or Triple versions with different control temperatures